




PELI SERIES RANGE

PROFESSIONAL LIGHTING SOLUTIONS

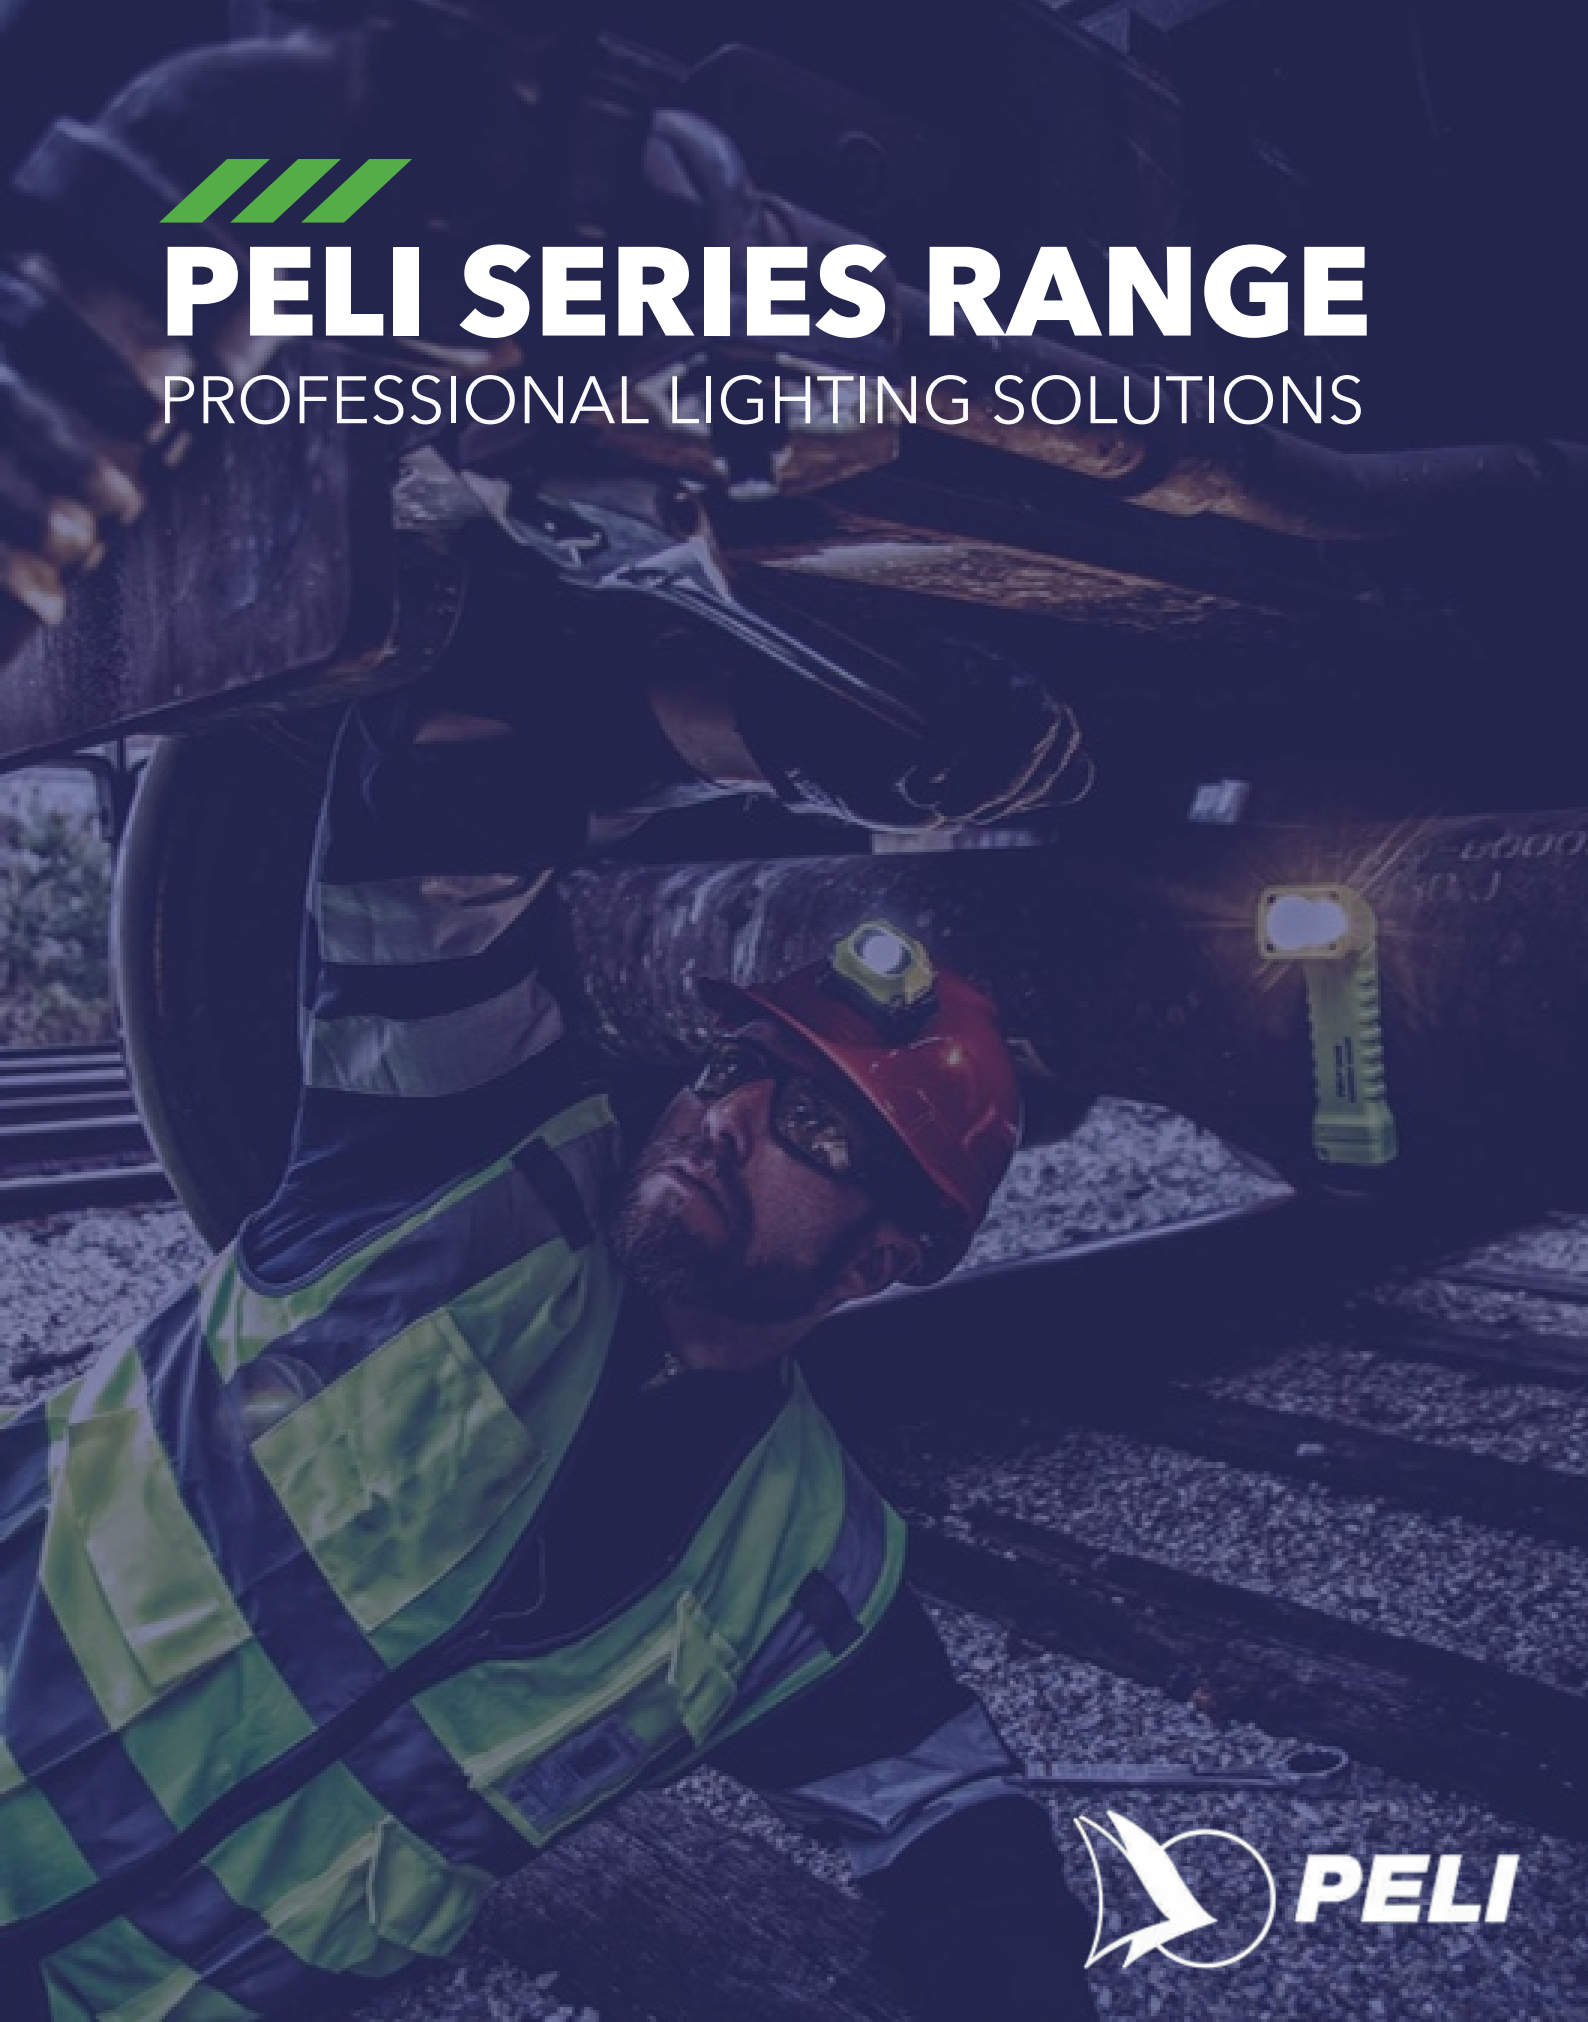

See More. Work Safer.



ATEX LIGHTS ZONE 0 & 1 (CAT. 1 & 2)

Peli ATEX lights are intrinsically safe portable lighting solutions engineered for use in hazardous and explosive environments. Designed for industries where safety is critical, they combine certified protection, rugged durability and dependable illumination to keep professionals working safely in the world's toughest conditions.

1975Z1 MITYLITE™ ZONE 1

LIGHT SOURCE
LED

BATTERIES
2AAA Alkaline

LENGTH
14.6 cm (5.75")

CERTIFICATIONS
II2 G Ex ibopisII B T4 Gb



LUMENS	RUN TIME
94	8h 15m

1975Z0 MITYLITE™ ZONE 0

LIGHT SOURCE
LED

BATTERIES
2AAA Alkaline

LENGTH
14.6 cm (5.75")

CERTIFICATIONS
II1 G Ex iaopisII C T4 Ga



LUMENS	RUN TIME
117	2h 15m

2410Z0 STEALTHLITE™ ZONE 0

LIGHT SOURCE
LED

BATTERIES
4AA Alkaline

LENGTH
17.8 cm (7")

CERTIFICATIONS
II 1 G Ex ia IIC T4Ga,
II 1 D Ex ia IIIC T135°C Da



LUMENS	RUN TIME
153	5h 45m

2460Z1 STEALTHLITE™ ZONE 1

LIGHT SOURCE
LED

BATTERIES
4AA NiMH

LENGTH
17.8 cm (7")

CERTIFICATIONS
II2 G Ex ib IIC T4Gb



LUMENS	RUN TIME
181	5h

3315Z0 ZONE 0

LIGHT SOURCE
LED

BATTERIES
3AA Alkaline

LENGTH
15.6 cm (6.14")

CERTIFICATIONS
II 1 G Ex ia IIC T4Ga,
II 1 D Ex ia IIIC T130°C Da



LUMENS	RUN TIME
138	19h

2745Z0 HEADSUP LITE™ ZONE 0

LIGHT SOURCE
LED

BATTERIES
3AAA Alkaline

LENGTH
5.7 cm (2.25")

CERTIFICATIONS
II1 G Ex ia opisII C T4 Ga

MODES
High / Low / Flashing



LUMENS	RUN TIME
33	40h

2755Z0 HEADSUP LITE™ ZONE 0

LIGHT SOURCE
LED

BATTERIES
3AAA Alkaline

LENGTH
5.7 cm (2.25")

CERTIFICATIONS
II1 G Ex ia opisII C T4 Ga

MODES
High / Low / Flashing



LUMENS	RUN TIME
115	16h

2765Z0 HEADSUP LITE™ ZONE 0

LIGHT SOURCE
LED

BATTERIES
3AAA Alkaline

LENGTH
5.7 cm (2.25")

CERTIFICATIONS
II1 G Ex ia opisII C T4 Ga

MODES
High / Low / Downcast /
Flashing



LUMENS	RUN TIME
141	14h

2690Z0 HEADSUP LITE™ ZONE 0

LIGHT SOURCE
LED

BATTERIES
3AAA Alkaline

LENGTH
7.1 cm (2.81")

CERTIFICATIONS
I M1 Ex ia I Ma,
II1 G Ex ia IIC T4 Ga,
II 1 D Ex ia IIIC T65°C Da



LUMENS	RUN TIME
74	11h

See Beyond The Dark

3415MZ0 FLASHLIGHT

Ex ZONE 0



LIGHT SOURCE
LED

BATTERIES
3AA Alkaline

LENGTH
18.9 cm (7.44")

CERTIFICATIONS
II1 G ExiaopisIICT4 Ga

MODES
High / Flashing



LUMENS	RUN TIME
329	14h

3335RZ0 FLASHLIGHT

Ex ZONE 0



LIGHT SOURCE
LED

BATTERIES
1Lithium-Ion18650

LENGTH
15.5 cm (6.11")

CERTIFICATIONS
III1 G Ex iaIICT4Ga



LUMENS	RUN TIME
246	58h

Right Angle
accessory available



9415Z0 LED LANTERN

Ex ZONE 0



LIGHT SOURCE
LED

BATTERIES
4C NiMH

LENGTH
22.2 cm (8.75")

CERTIFICATIONS
II1 G Ex ia IICT4Ga

MODES
High / Low / Flashing



LUMENS	RUN TIME
530	11h 30m



Rechargeable
Battery



Magnetic
Clip



ZONE 0

INDUSTRIAL LIGHTS

Peli Industrial Lights are built to perform in the toughest working environments. Engineered for exceptional durability and reliable performance, they withstand impact, harsh conditions and everyday industrial use. Compact, powerful and available with features such as photoluminescent housings, they provide dependable illumination whenever and wherever it's needed.

9050 LED LANTERN

Ex ZONE 0



LIGHT SOURCE
LED

BATTERIES
218650Lithium-ion

LENGTH
20,4 cm(8.03")

MODES
High / Low / Flashing
Flexible battery system



LUMENS	RUN TIME
3369	5h 30m

THE VERSATILE LANTERN WITH A DUAL LITHIUM-ION / ALKALINE BATTERY SYSTEM

Holds up to 4 lithium-ion rechargeable batteries or up to 16 AA alkaline or NiMH batteries.



Bring Light Anywhere.



REMOTE AREA LIGHTING SYSTEMS (RALS)

Peli Remote Area Lighting Systems (RALS) are engineered to provide powerful, portable illumination wherever it's needed most. Designed for remote locations, confined spaces and demanding work environments, these self-contained, rechargeable lighting systems deliver exceptional performance, long run times and rugged durability without the need for a generator.

9455Z0 RALS



ZONE 0



COMPLETELY COLLAPSIBLE

Easy carry and quick set ups

MODES

High / Low
Flexible battery system

CERTIFICATIONS

Class I Division 1,
ATEX Zone 0, IECEx

BATTERIES

NiMH rechargeable battery



LUMENS	RUN TIME
1600	10h

WORLD'S SAFEST CERTIFIED LIGHTING SYSTEM

9490 RALS



COMPLETELY COLLAPSIBLE

Easy carry and quick set ups

MODES

High / Medium / Low /
Flashing

INTELLIGENT CONTROL

Allows for various light
output levels

BATTERIES

Rechargeable battery



LUMENS	RUN TIME
6000	24h

9730 RALS

COMPLETELY COLLAPSIBLE

Easy carry and quick set ups

MODES

High, Medium, & Low

RUGGED & RELIABLE

IPX4-rated, water-resistant

LIGHT SOURCE

LED



LUMENS	RUN TIME
4800	13h

9750 RALS

COMPLETELY COLLAPSIBLE

Easy carry and quick set ups

MODES

High, Medium, & Low

RUGGED & RELIABLE

IPX4-rated, water-resistant

INTELLIGENT CONTROL

Flood, & Spot + Flood light mode



LUMENS	RUN TIME
8250	24h